



think fast.

The gx 2c features even more GPU processing power, more capture, more storage, as well as 10-bit and HDR support to match your creative demands.

Warranties & Support

- 2 year return to base hardware warranty (plus options to extend warranty length)

Bundled accessories

Keyboard, Mouse & Pad, Power Cable (Plug-True1), Power Daisy Chain (True1-True1), Active DP to DVI adapter, Getting Started Guide + Manual, Backmounted Rails.

Software

- Notch Playback License (2 years)


Upgrades

(AS - At Sale, F - Field, RTM- Return to Manufacturer)

- Storage Upgrade 8TB ^{AS, RTM}
- Storage Upgrade 16TB ^{AS, RTM}

Physical specifications

Packed Dimensions:	W	H	D
	711mm 28"	508mm 20"	737mm 29"
Unit Dimensions:	W	H	D
	445mm 17.52"	178mm 7"	593mm 23.35"
Unit + Rack Handles	W	D	
	483mm 19"	621mm 24.45"	
Rack Depth:			D
			585mm 23.03"
Unit Weight:			EST.
			16.8kg
Packed Unit Weight:			EST.
			24.9kg

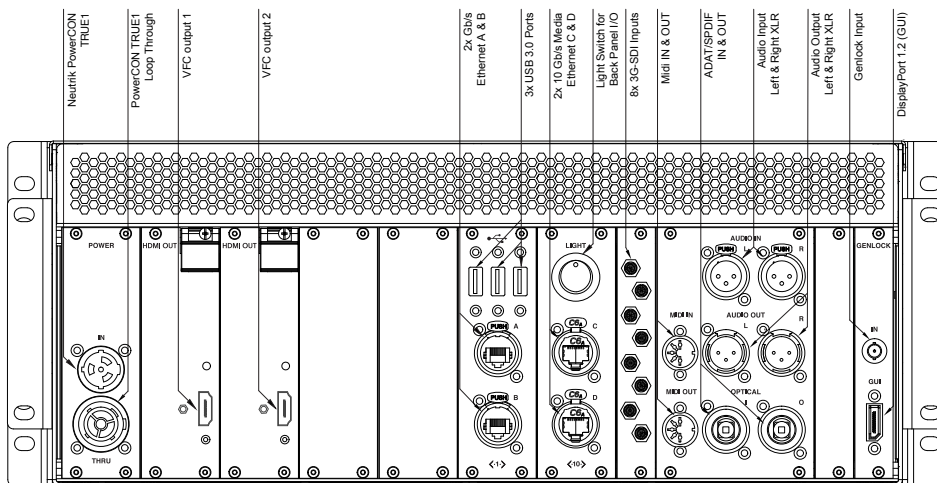

Hardware specifications

Voltage: 100-240V, 50-60Hz*
Power Consumption:
 720VA @ 240V, 50Hz(max)
Operating System: Windows Enterprise SAC

Environmental Tolerances:
 Temperature: 5-35°C (40°-95°F)
 Humidity: 5%-95% (non-condensing)
 Altitude: 0-8850 ft (0-2700m)
Mounting System:
 4U 19" rack mount

Audio: RME Professional
OS: Dedicated drive
Storage: 3.84TB Internal NVMe SSD

System connectivity I/O

Video Output:
 1x DisplayPort 1.2 (GUI)
 2x VFC Output Slots
 Ships standard with HDMI 2.0 VFC cards

Different Video Format Conversions cards also available, refer to VFC Specifications

Video Input:
 8x 3G-SDI or 2x 2160p (Quad Split) (HD-BNC connectors)
Analogue Audio:
 2x Balanced XLR Output
 2x Balanced XLR Input
 1x 1/4" Headphones Jack
Digital Audio:
 ADAT/SPDIF I/O
MIDI:
 1x In, 1x Out

General Network:
 1x 1Gb/sec Ethernet
Media Network: 2x 10Gb/sec Ethernet
Data/Peripherals:
 5x USB 3.0
Video Sync:
 BNC Genlock

* for countries with variable power supply we recommend a UPS to provide a consistent voltage